ACS cars

Advanced Calibration System Cars

DOC.22442-REV.00.07

ENG Translation of the original instruction manual

WOW! Würth Online World GmbH
Schliffenstraße 22
74653 Künzelsau Gaisbach
Germany
+49 7940 981 88 - 0

info@wow-portal.com
www.wow-portal.com

Copyright © 2019 WOW! Würth Online World GmbH, all rights reserved.
Not to be reproduced, in whole or in part, without prior consent.
We reserve the right to make changes to the product at any time, if we consider them to be in the interest of quality improvement, without prior notice or notification. Figures may be examples that may differ in appearance from the goods delivered.
Subject to correction in case of errors, we do not accept liability for misprints.
Our general terms and conditions apply.

Content

1 Safety instructions ... **3**
1.1 Safety instructions for the ACS cars trolley ... 3
1.2 Safety precautions relating to the laser pointer ... 3
1.3 Safety precautions relating to risk of injury ... 3
2 Product description ... **4**
2.1 Intended use ... 4
2.2 Scope of delivery ... 4
2.3 ACS cars trolley ... 5
2.4 Wheel clamps and mirror scale unit ... 6
2.5 Laser on the laser carrier bar ... 7
2.5.1 Replacing the battery ... 7
3 Assembly instructions for ACS cars ... **8**
4 Working with ACS cars ... **9**
4.1 Prerequisite for use ... 9
4.2 Requesting manufacturer-specific instructions and help ... 9
4.3 Positioning ACS cars in front of the vehicle ... 9
4.4 Adjusting the height of the calibration board and laser carrier bar ... 10
4.5 Positioning the ACS cars ... 11
4.5.1 Mounting the wheel clamps on the front wheels ... 11
4.5.2 Adjusting the distance of ACS cars to the vehicle ... 12
4.5.3 Placing ACS cars centrally in front of the vehicle ... 12
4.6 Positioning ACS cars parallel to the vehicle ... 13
5 General information ... **15**
5.1 Maintenance and care ... 15
5.2 Disposal ... 15

1 Safety instructions

The ACS cars system is exclusively designed for use on vehicles for the calibration of driver assistance systems. In order to use ACS cars, the operator must have knowledge of automotive technology and knowledge of potential hazards and risks in the workshop or the vehicle.
All measures and safety instructions in the instruction manual, which are given below, must be observed. In addition, all general legal regulations and rules of conduct that apply when working in the workshop must be observed.

1.1 Safety instructions for the ACS cars trolley

In order to avoid incorrect operation and resulting injury to the operator or damage to the ACS cars system, the following points must be observed:

- The setup and training for ACS cars should only be carried out by our service engineers.
- Protect ACS cars and the laser pointer from water (not waterproof).
- Protect ACS cars from hard impacts (do not drop it).

1.2 Safety precautions relating to the laser pointer

When working with the laser pointer, there is a risk of injury due to possible dazzling.
Please observe the following:

- Wear suitable anti-glare goggles.
- Never aim the laser beam at people, doors or windows.
- Never look directly into the laser beam.

1.3 Safety precautions relating to risk of injury

When working on the vehicle, there is a risk of injury due to the vehicle rolling away.
Please observe the following:

- Put automatic vehicles into the park position.
- Secure the vehicle against rolling away.

2 Product description

2.1 Intended use

ACS cars is a system for calibration of driver assistance systems, which is suitable for use in the multi-brand segment. Using expandable accessories, manufacturer-specific adjustments can be made to a wide range of assistance systems.
In conjunction with a diagnosis system and the corresponding accessories from WOW!, Autocom or WABCOWÜRTH, the assistance systems installed in the vehicle, such as the camera for the lane departure warning system or the radar sensor for the ACC (Adaptive Cruise Control), can be calibrated.

2.2 Scope of delivery

Check the scope of delivery on or immediately after delivery, so that any damage or missing parts can be reported immediately.

Quantity	Designation
1	Trolley with board carrier (without targets)
2	RH4-4/22 wheel clamps
1	Left laser carrier bar, laser mounted
1	Right laser carrier bar with stud bolts, laser mounted
1	Accessory case with contents
2	Mirror scale units (MSU)
4	Measuring tape holders
1	Measuring tape
1	Line laser
1	Laser viewing glasses
8	Knurled screws, black
8	Knurled screws, white

2.3 ACS cars trolley

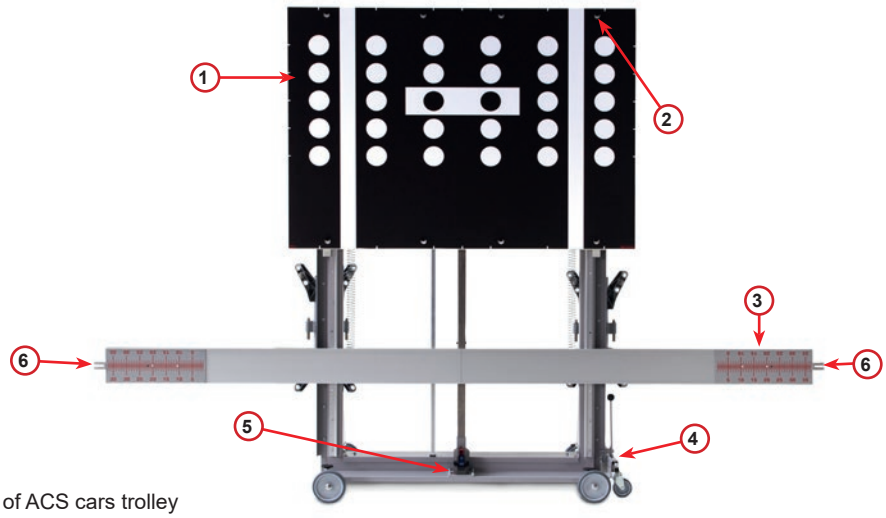

Fig. 001 Front of ACS cars trolley

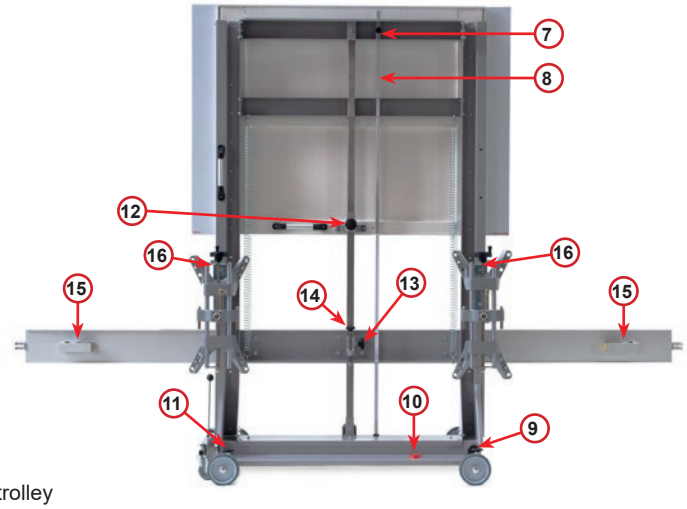

Fig. 002 Back of ACS cars trolley

Legend

Number	Description
1	Calibration board holder. Different calibration boards are used depending on the vehicle manufacturer. These are optionally available.
2	8 x knurled screws for securing the calibration boards
3	Laser carrier bar with adjustment scale
4	Manoeuvring unit
5	Mount for line laser
6	Measuring tape holder
7	Knurled screw for measuring scale
8	Measuring scale for height adjustment of calibration board holder and laser carrier bar
9	Fine adjustment screw for board carrier
10	Spirit level

Number	Description
11	4 x star grip screws for levelling the trolley
12	Knurled screw for height adjustment of the calibration board holder
13	Knurled screw for height adjustment of the laser carrier bar
14	Fine adjustment screw for laser carrier bar
15	Left and right laser
16	Wheel clamp holder

2.4 Wheel clamps and mirror scale unit

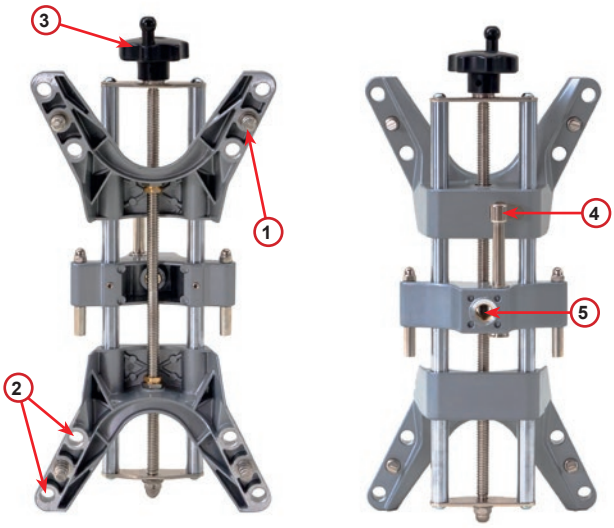

Fig. 003 Wheel clamps

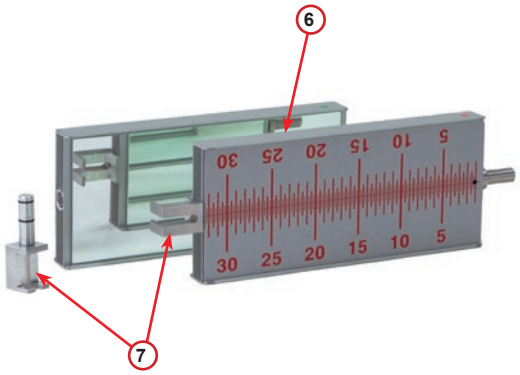

Fig. 004 Mirror scale unit (MSU)

Number	Description
1	Double-profile claws (4* per wheel clamp)
2	Slot for double-profile claws
3	Handwheel for tightening the wheel clamp
4	Mounting screw for MSU
5	Socket for MSU
6	Mirror scale unit (MSU)
7	Measuring tape holders

2.5 Laser on the laser carrier bar

2.5.1 Replacing the battery

Battery type: 2 x Mignon AA 1.5V

CAUTION! For installation direction, observe the polarity of the batteries.

1. Using a suitable screwdriver, gently push the locking mechanism (1) and open the cover (2) upwards.

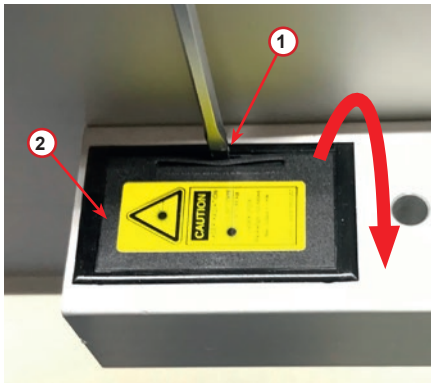

2. Replace the two Mignon AA 1.5V batteries (3) and close the cover again.
   CAUTION! Observe the polarity of the batteries.

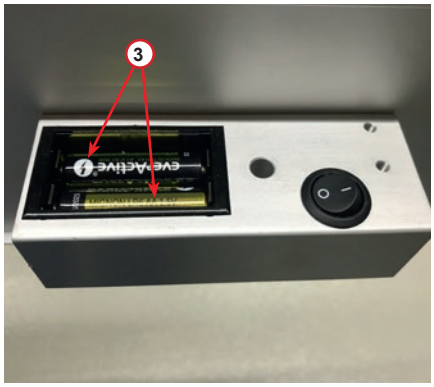

3 Assembly instructions for ACS cars

ACS cars is largely pre-assembled, all that remains to be done it to mount the laser carrier bars.

Tools required:

- Allen key 5 mm

Method:

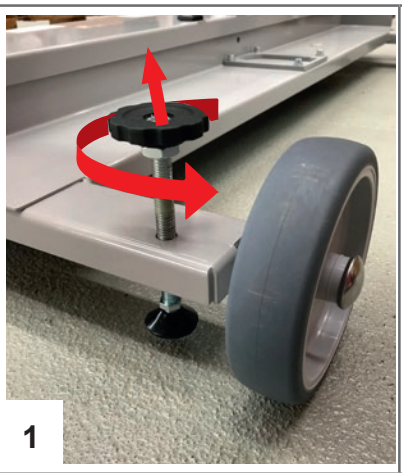

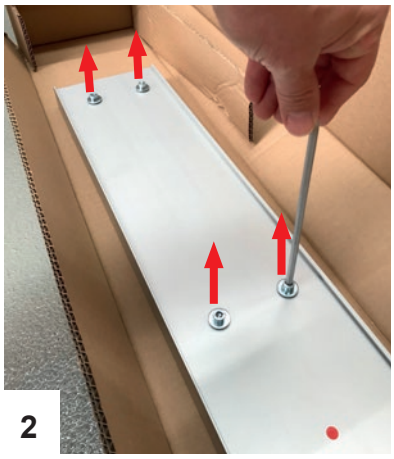

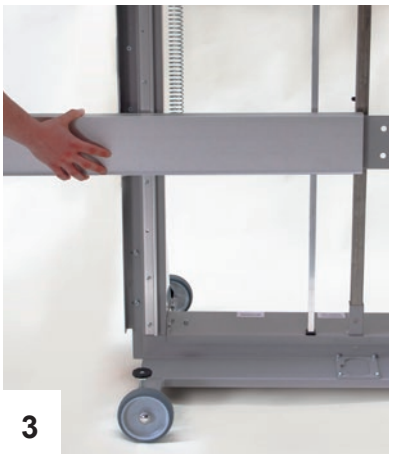

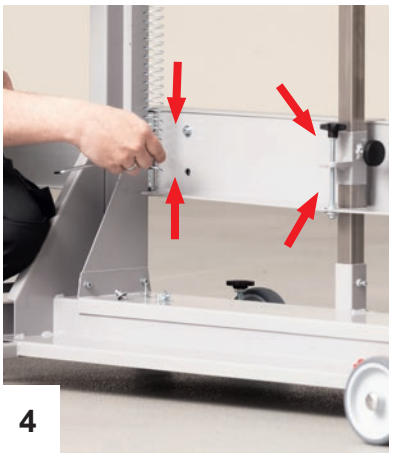

Insert bolts but do not tighten.

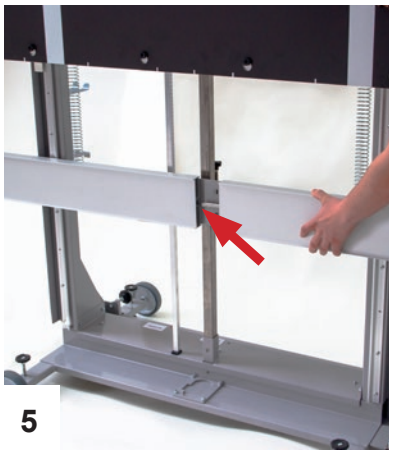

Slide in right laser carrier bar.

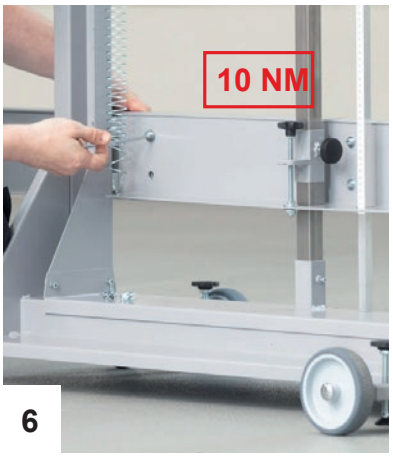

Tighten all 8 bolts to 10 Nm.

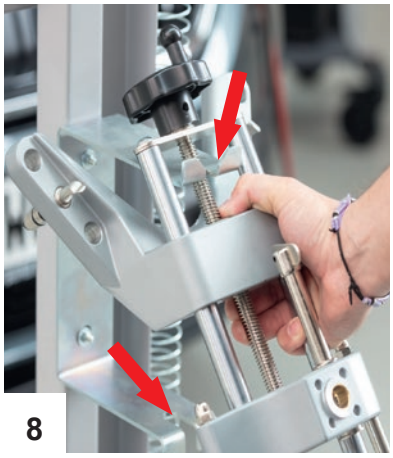

4 Working with ACS cars

The following steps are necessary to position the ACS cars. These vary depending on the vehicle manufacturer.

1. Observe manufacturer-specific instructions and help.
2. Adjust the height of the calibration board and laser carrier bar.
3. Position ACS cars in front of the vehicle.
4. Position ACS cars parallel to the vehicle.
5. Position ACS cars centrally in front of the vehicle.

4.1 Prerequisite for use

Please ensure the following before positioning the ACS cars:

- The vehicle and the ACS cars are standing absolutely level.
- The vehicle systems work faultlessly.
- No faults are stored in the fault memory of the control unit.
- Tyre pressure is set according to the manufacturer's specifications.
- Any vehicle-specific preparations are carried out, see manufacturer's information.
- Tracking of the rear axle is correctly set.
- Vehicle is unloaded.
- Windscreen in the area of the camera has been cleaned.

4.2 Requesting manufacturer-specific instructions and help

Method:

1. Connect the diagnostic device to the vehicle and select the vehicle.
2. In the **Diagnosis** menu, select the system to be calibrated. Go to **Function > Calibration > Help** to view the manufacturer-specific instructions.
3. Attach the manufacturer-specific calibration board to the ACS cars

4.3 Positioning ACS cars in front of the vehicle

Method:

NOTE! The vehicle and the ACS cars must be standing absolutely level.

1. To manoeuvre the ACS cars trolley, lower the manoeuvring unit.
   To do this, push the lifter lever (1) down.
   This makes the ACS cars trolley easier to manoeuvre.
2. Position the ACS cars trolley in front of the vehicle.

4.4 Adjusting the height of the calibration board and laser carrier bar

Tools required:

- Measuring tape from the ACS cars accessory case.

Method:

1. Determine the height from the ground to the centre of the wheel hub.

2. Loosen the knurled screw on the measuring scale (1) and lower the measuring scale to the floor.

WARNING! Risk of injury
Laser carrier and calibration board holder are pre-tensioned. When loosening the star grip screw, apply counter-pressure to the laser carrier or calibration board holder with your hand.

3. Loosen the knurled screw of the laser carrier bar (1) and set the measured height of the centre of the wheel hub (2). Tighten the knurled screw again.
   Fine adjustment can be carried out with the fine adjustment screw (3).

4. Loosen the knurled screw on the calibration board holder (1) and set the calibration board height (2) according to the manufacturer's specifications. Tighten the knurled screw again.
5. Secure the measuring scale in its original position to prevent damage to the scale when moving the ACS cars trolley.

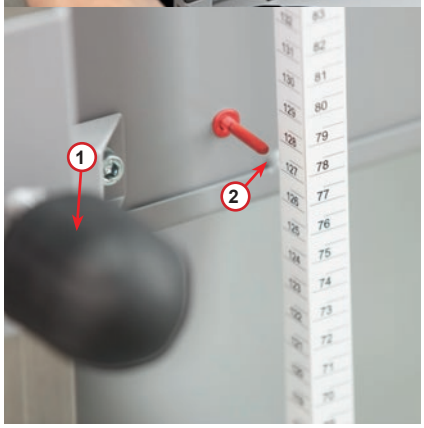

4.5 Positioning the ACS cars

Tools required:

- Measuring tape
- Wheel clamps
- Mirror scale unit (MSU)
- Measuring tape holders

Method:

4.5.1 Mounting the wheel clamps on the front wheels

CAUTION! Damage to the rims!
Using the wrong double-profile claws can result in the rims becoming scratched. Carefully attach the wheel clamps to the rims.
Make sure to use the correct double-profile claws for aluminium or steel rims.

The procedure may vary depending on the manufacturer. Current information can be found in the WOW! diagnostic software.

1. Insert double-profile claws (1) for aluminium or steel rims into the wheel clamp sockets the right way round.

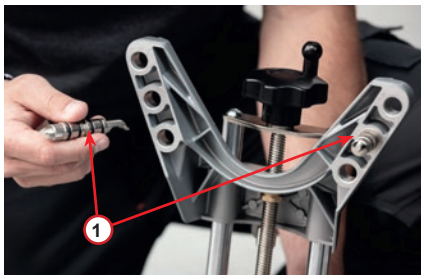

2. Adjust the wheel clamp to the size of the rim using the star grip screw (1) .
3. Carefully place the double-profile claws on the rim flange (2) and tighten with the star grip screw (1) .
4. Check that the wheel clamp is fitted securely.

5. Mount the mirror scale unit (MSU) (1) on the wheel clamp.

4.5.2 Adjusting the distance of ACS cars to the vehicle

TIP: Adjust the distance on the left side of the vehicle first. The manoeuvring aid on the right side of the ACS cars trolley makes it easier to position.

1. Attach the 1st measuring tape holder (2) to the mirror scale unit (MSU).
2. Attach the 2nd measuring tape holder to the left laser carrier (1) .
3. Hang the measuring tape on the 1st measuring tape holder (2) on the front axle.
4. Adjust the distance to the laser carrier by manoeuvring the ACS cars trolley. Follow the manufacturer's specifications.
5. Repeat steps 1–4 on the right side.

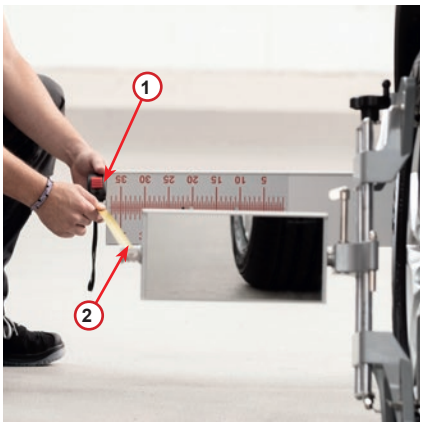

NOTE: The distance from the ACS cars trolley to the vehicle must be the same on both sides.

6. When both sides have been adjusted, position the lifter lever of the manoeuvring aid upwards so that the ACS cars trolley is standing on all 4 wheels.

4.5.3 Placing ACS cars centrally in front of the vehicle

WARNING! When working with the lasers, there is a risk of injury due to dazzling. Never look directly into the laser beam.

Tools required:

- Line laser

Method:

1. Insert the line laser (1) from the accessory case into the mount on the ACS cars trolley and switch it on.
   (See also the instruction manual from the manufacturer.)
2. Position the ACS cars trolley with the line laser in the centre of the vehicle.
   TIP: The brand logo, for example, can be used as a reference point.
3. Switch off the line laser again.

4.6 Positioning ACS cars parallel to the vehicle

Tools required:

- Wheel clamps
- Mirror scale unit (MSU)

Method:

1. Remove the wheel clamps together with the MSU on the front wheels and mount them on the rear wheels.
2. Switch on the laser pointers on the left and right.

WARNING! Risk of dazzling!
Always tilt the mirrors downwards to avoid dazzling.

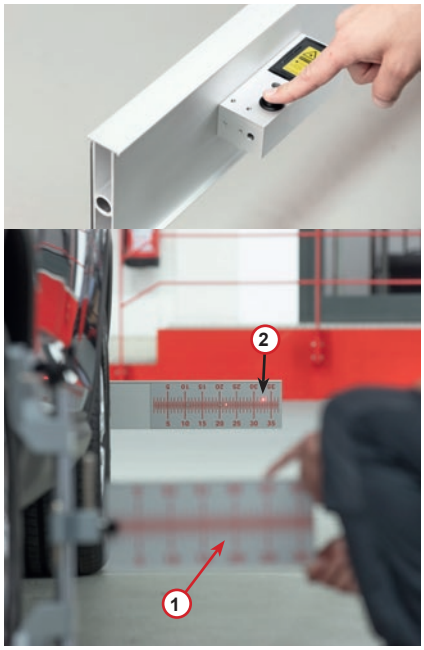

3. Turn the mirror side of the MSU (1) towards the direction of travel and adjust so that the reflected laser spot (2) is visible on the scale of the laser carrier bar.

4. Turn the fine adjustment screw (1) to set the laser spots on the measuring scales on the laser carrier bar on the driver and passenger side to the same value (2) .

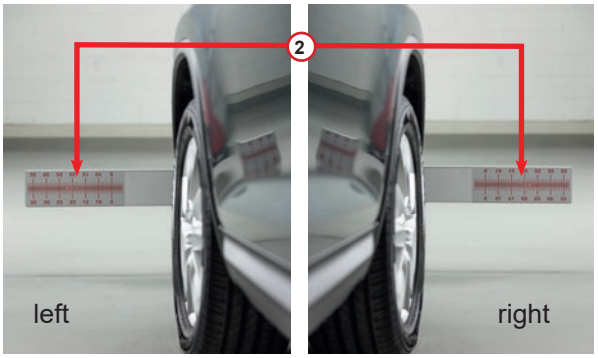

5. Turn the measuring scale side of the MSU (1) towards the direction of travel so that the laser spot on the measuring scale of the MSU is visible on the rear axle.

6. Move the ACS cars trolley (1) parallel with the front of the vehicle until the same value is set on the left and right of the measuring scales (2) .

7. Switch off the laser on the laser carrier bar. Positioning is complete.
8. The calibration can now be performed with the diagnosis system.

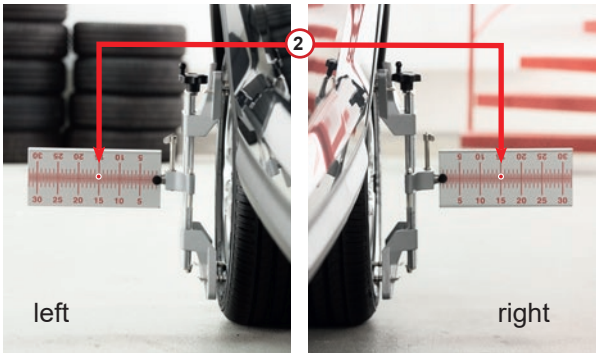

5 General information

5.1 Maintenance and care

- The ACS cars should be handled with care.
- Lubricate moving parts regularly. Use only acid-free and resin-free lubricants.
- Check mounting bolts regularly for tightness.
- Clean the ACS cars regularly. Use a soft cleaning cloth and a non-aggressive cleaning agent.
- Replace damaged accessory components immediately and only with original spare parts.

5.2 Disposal



Power tools, accessories and packaging should be disposed of in an environmentally friendly manner. Do not place power tools in your household waste.

For EU countries only:

According to European Directive 2012/19/EC on Waste Electrical and Electronic Equipment and its transposition into national law, power tools that are no longer usable must be collected separately and recycled in an environmentally friendly manner.

According to Directive 2006/66/EC, defective or used batteries must be recycled.

Accumulators/Batteries:

Do not place batteries in the household waste, fire or water. Batteries must be collected, recycled or disposed of in an environmentally friendly manner.

Since this device is exclusively for commercial use (B2B), it must not be disposed of via public waste disposal companies.

The device can be disposed of (stating the date of purchase and the serial number) at:

WOW! Würth Online World GmbH
Schliffenstraße 22
D-74653 Künzelsau
Germany

T: +49 7940 98188 - 0
F: +49 7940 98188 - 1099
E: info@wow-portal.com

WOW! Würth Online World GmbH
Schliffenstraße 22
D-74653 Künzelsau Gaisbach
Germany

T: +49 7940 98188 - 0
F: +49 7940 98188 - 1099
E: info@wow-portal.com

DOC.22442-REV.00.07
© by WOW! Würth Online World GmbH